

STNC®



 **STNC** Sole Agent :

ISO9001-2008



People's talent first Innovation Development Win-win mode

STNC Pneumatic

Ningbo Sono Manufacturing has a history of 23 years in pneumatic field. Our company has set up Zhejiang provincial research and development center and hired domestic and overseas engineers. we produce six series of products as following: Air source treatment, Pneumatic control elements, Pneumatic act elements, Air press punch, Pipe fittings and Pneumatic tubes. We have the ability to supply the whole set of pneumatic system. Adopting the international advanced technique and machine equipment, we have passed ISO9001:2008 and got CE, ROHS certifications. And developing actively the market of home and abroad and building a wide sales net and after-sale service system. Satisfactory service to customers . Meanwhile, we won “National High and New Technology Enterprises”, ” Technology Innovation Model Company” and so on . STNC brand has been Famous Brand in Zhejiang province, STNC products have been regarded as brand products in Zhejiang province, selling well all over the world.





General manager and the Chairman of ISO/TC131

General manager and the secretary-general

STANDARD Level of determinant

The symbol of the level of the company

Standard is what to identify the products' quality. Go for establish the standard is the symbol of the level of the company.

Mr Mao Xinqiang is the general manager of Ningbo Sono Manufacturing Co; Ltd, and also is one member of the (SAC/TC3/SC2). 3 national standard is made by our company in the last 3 years.

November, 2008, Mr Mao Xinqiang went to UK to attend the meeting of ISO/TC131/SC5 as the only one from China.



HONOR The achievement we got


It's also the symbol of power, not only honor

Ningbo Sono Manufacturing Co; Ltd got a lot of honor, because of power of manufacturing, first class technical standard, deal with concrete matters relating to work, because of profession .



2008 Beijing Olympic Game is the blend of the Chinese culture and Olympic spirit; it's our honor that we can do something for this.

We design and carry out the project as "The letter to future", "Red leaves fly in the sky", "Flower blossom out in the lawn" during 2008 Beijing Olympic Game.

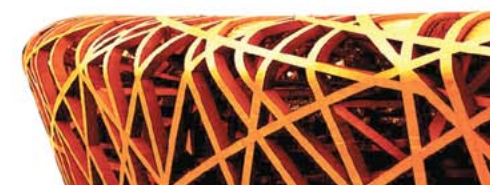



FRL Department

Fitting Department

Mould Department

ADVANCED EQUIPMENT

Make sure precision

If the products are precise, the equipment should be precise first.

Company own series of advanced equipment for manufacturing and testing for mould manufacturing, part produce, surface process, serial production. Imported CNC and precise numerical control equipment are the mainly equipment for machining. Each assembly line got the professional testing equipment....., Make sure all the products are qualified when leaving the company.

INNOVATION

Leading the company developing

Technical innovation is the power and source of the company for continuous developing.

We launched research and develop center, hire 2 professional experts as the leader of our technical team. We have capability for testing and life testing in the R&D Center. Every body got their own work to work for product design& technical research and so on.

During the latest 3 years, 6 independent innovation items each year. 1/3 got the patent.



Simulate product line are under debugging



Flow rate lab



Cylinder Department with numerical control Lathe



Solenoid Valve department with CNC that is imported



Research new product with the expert from Europe

Room of R&D Centre






STNC


STNC PNEUMATIC

In order to make sure our products are the best in the market. We keep the right to update the product information any time when necessary. And we don't inform.


Our air-source treatment products (F.R.L) are in novel design, simple structure, with handsome shape, high performance and easy maintenance. There are various types and specifications in grade of reasonable price to meet all customers' needs.

- Pipe size : G1/8-G1/2
- Filtration : 5 μ m
- Working pressure : LF, LOE series : 0-16Mpa, LR, LFR series : 0.05-1.2MPa
- Applicable temperature : 0-60°C

LF series Filter

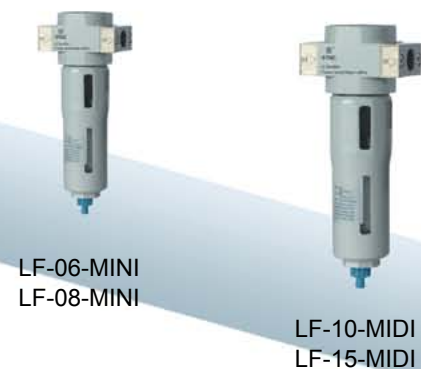

LOE series Lubricator

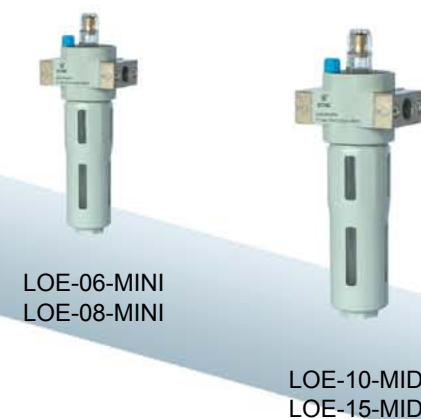

LFC series Treatment Dyad



LR series Regulator



LC series Treatment Triplet



GFR Series Filter Regulator



LFR series filter regulator



GL Series Lubricator



GFC Series FR+L



GC Series F+R+L



GR Series Regulator



GF Series Filter



Our air-source treatment products (F.R.L) are in novel design, simple structure, with handsome shape, high performance and easy maintenance. There are various types and specifications in grade of reasonable price. They can meet all customers' needs.

- Port size : G1/8—G1
- Filtration : 5μm
- Working pressure : 0—1Mpa
- Applicable temperature : 0—60°C

TF Series Filter



TR Series Regulator



TL Series Lubricator



TW Series Filter regulator



TW1000-M5



TW2000-02
TW2000-01



TW2000-02D
TW2000-01D



TW2000-02U
TW2000-01U



TW2000-02DU
TW2000-01DU



TW2000-02M
TW2000-01M



TW3000-03
TW3000-02



TW3000-03D
TW3000-02D



TW3000-03M
TW3000-02M



TW3000-03DM
TW3000-02DM



TW4000-06
TW4000-04
TW4000-03



TW4000-06D
TW4000-04D
TW4000-03D



TW4000-06M
TW4000-04M
TW4000-03M



TW4000-06DM
TW4000-04DM
TW4000-03DM



TW5000-10
TW5000-06



TW5000-10D
TW5000-06D



TW5000-10M
TW5000-06M



TW5000-10DM
TW5000-06DM

TC Series FR+L



TC1010-M5



TC2010-02
TC2010-01



TC2010-02D
TC2010-01D



TC2010-02U
TC2010-01U



TC2010-02DU
TC2010-01DU



TC2010-02M
TC2010-01M



TC3010-03
TC3010-02



TC3010-03D
TC3010-02D



TC3010-03M
TC3010-02M



TC3010-03DM
TC3010-02DM



TC4010-06
TC4010-04
TC4010-03



TC4010-06D
TC4010-04D
TC4010-03D



TC4010-06M
TC4010-04M
TC4010-03M



TC4010-06DM
TC4010-04DM
TC4010-03DM



TC5010-10
TC5010-06



TC5010-10D
TC5010-06D

TC Series F+R+L



TC Series F+R+L



Regulator




Big Filter



Big Regulator



Precise Regulator

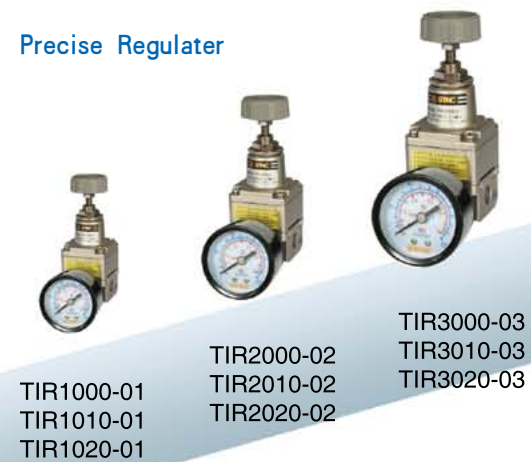

Remove the contamination in compressed air such as oil, water and solid etc. improve the performance of dryer in downstream. extend the lifetime of precision filter, prevent the breakdown of component.

AFF series main road filter



AFF2B AFF4B AFF8B AFF11B
AFF22B AFF37B AFF75B

AM series oil separator



AM150
AM250
AM350
AM450
AM550
AM650
AM850

AMD series micro mist separator



AMD150 AMD250 AMD350 AMD450
AMD550 AMD650 AMD850

AMH series micro mist separator with front filter



AMH150
AMH250
AMH350
AMH450
AMH550
AMH650
AMH850

AMG series drop separator



AMG150 AMG250 AMG350 AMG450
AMG550 AMG650 AMG850

AME series ultramicro oil separator



AME150 AME250 AME350 AME450
AME550 AME650 AME850

AMF series deodorised filter



AMF150 AMF250 AMF350
AMF450 AMF550 AME650
AMF850

TRY Series Regulator

● Highest pressure 1.6Mpa



TRY-8
TRY-10
TRY-15

TRY-20
TRY-25

TRY-40
TRY-50

TSL Series Air Filter

● Highest pressure 1.6Mpa



TSL-08D
TSL-10D
TSL-15D

TSL-20D
TSL-25D

TSL-40D
TSL-50D

TIU Series Lubricator

● Highest pressure 1.6Mpa



TIU-08
TIU-10
TIU-15

TIU-20
TIU-25

TIU-40
TIU-50

TYH Series High Pressure Regulator

● Highest pressure 3.6Mpa



TYH-8
TYH-10
TYH-15

TYH-20
TYH-25

TSL Series Air Filter

● Highest pressure 1.6Mpa



TSL-08
TSL-10
TSL-15

TSL-20
TSL-25
TSL-40
TSL-50

TSH Series High Pressure Filter

● Highest pressure 3.6Mpa



TSH-8
TSH-15
TSH-20
TSH-25

Air Source Treatment




Water cup / Oil cup(metal cup)



Auto drain cup

Air Source Treatment Film

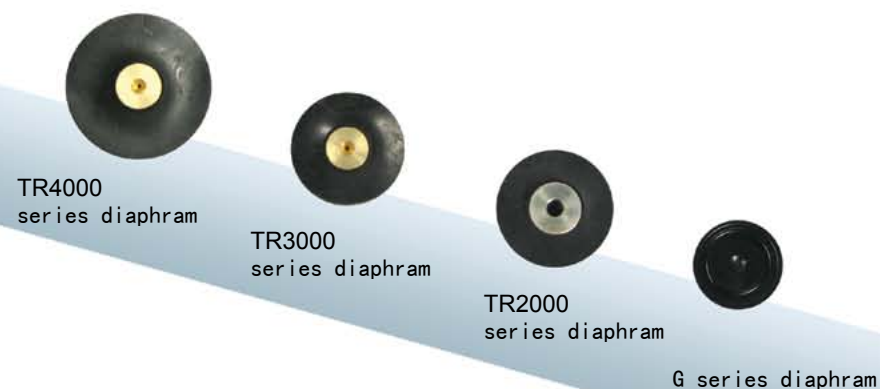

Pressure Gauge



Air Source Connector




Auto Drain Valve



Filter element



TF2000 filter element
TF3000 filter element
TF4000 filter element
TF5000 filter element
GF2000 filter element
GF3000 filter element

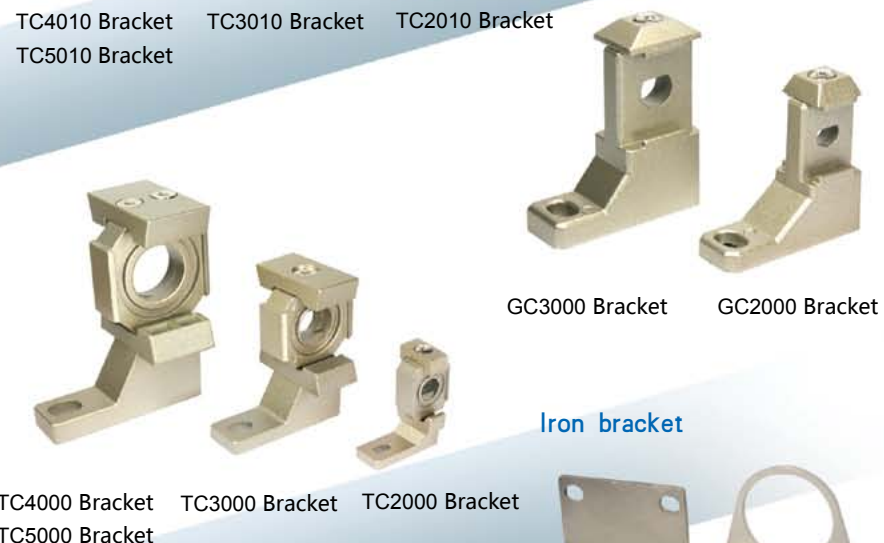


Iron bracket

TF2000/3000 Bracket
TF4000/5000 Bracket
TR2000/3000 Bracket
TR4000/5000 Bracket



FY Series Solenoid Valve


- Compact structure, quick reaction

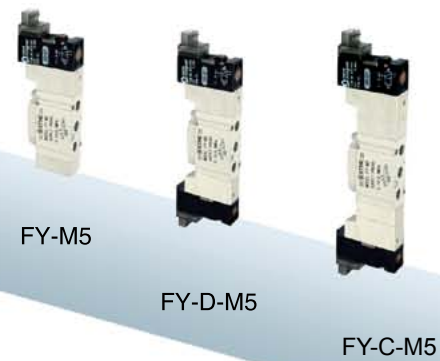

FY-02

FY-D-02

FY-C-02

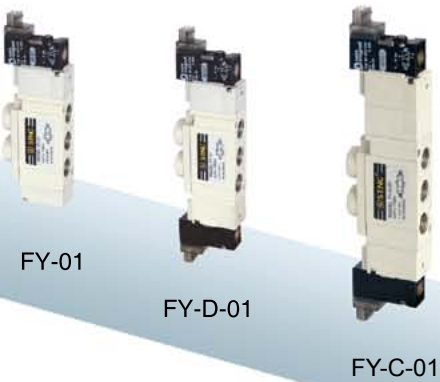


FYA-M5

FYA-D-M5

FYA-01

FYA-D-01

FY Series Manifold

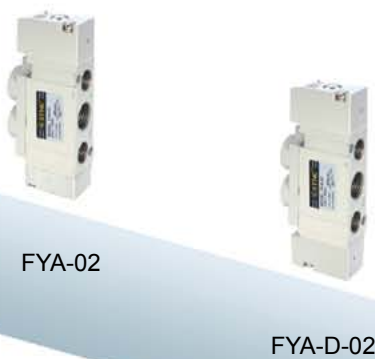

It is a pneumatic valve controlled by micro electric signal, with small dimension, large flow, handsome shape, reliable performance and long service life, it can be installed in integration. It is an ideal direction control element, applicable to the electro-mechanical integration. There are multiple specifications for your choice.

- Port size: G1/8—G1/2
- Working pressure: 0.15—0.8Mpa
- Applicable temperature: -5—50°C




2 Positions/2 Ports, 2 Positions/3 Ports Series Solenoid Valve



TG Series namur Solenoid Valve




TG Series Air control Valve

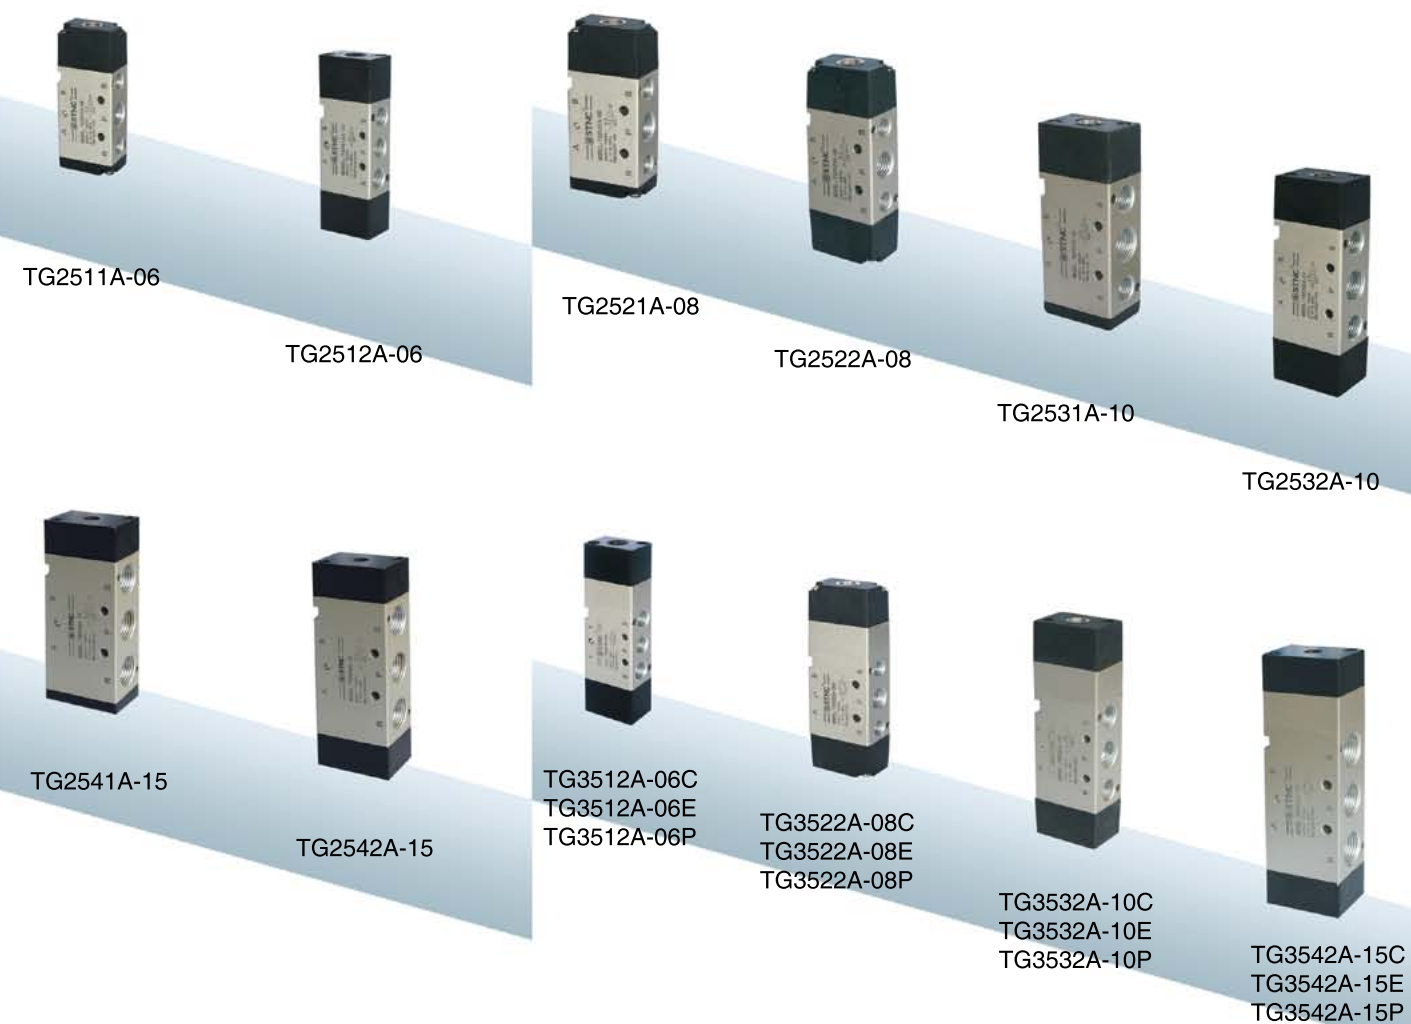

G Series Manifold

● Ordering Code

G	100	5T
series	Type	number of connector
	100: 1/4	130: 1/4
	200: 1/4	230: 1/4
	300: 3/8	330: 3/8
	400: 1/2	430: 1/2

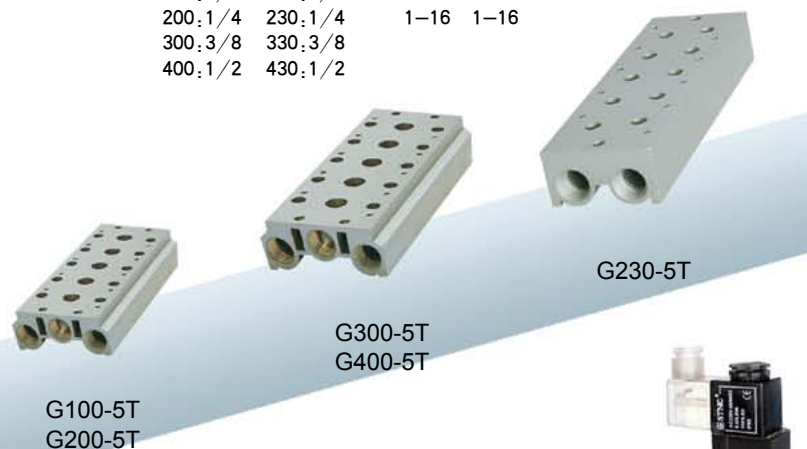

FG Series Solenoid Valve



FG Series Solenoid Valve



FG2581-25L



FG2582-25L



FG3512-06CL



FG3522-08CL



FG3532-10CL



FG3542-15CL



FG3562-20CL



FG3582-25CL

FG Series Air control Valve



FG2511A-06



FG2512A-06



FG2521A-08



FG2522A-08



FG2531A-10



FG2532A-10

TM Series High Frequency Valve



TM-06
TM-08



VT307-02
VT307V-02

TGV Series Diaphragm Valve



TGV24-08L



YH23JD-8
YH23JD-15



YH23JD-8P₂
YH23JD-15P₂

FG Series Manifold



F100-5T



F200-5T



F230-5T



F300-5T



FG2581A-25



FG2582A-25


FG Series Air control Valve



FG2541A-15



FG2542A-15



FG2561A-20



FG2562A-20

Hand Valve



The valve has fantastic outlook, credible function, and more durable with many specifications!



Hand-Draw Valve



Hand-Draw Valve

TGA Series Manually-Turn Valve

Pressure: 0-0.8MPa



Mechanical Valve




K Series Manually-Turn Valve



Manually-Turn Valve (Ceramic Seal)


Pressure: 0-1.0MPa

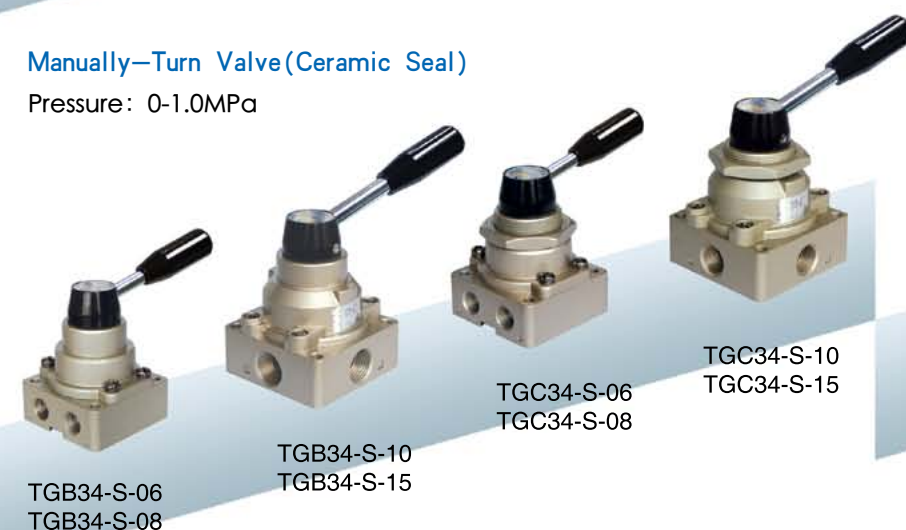

Mechanical Valve



Manually-Turn Valve

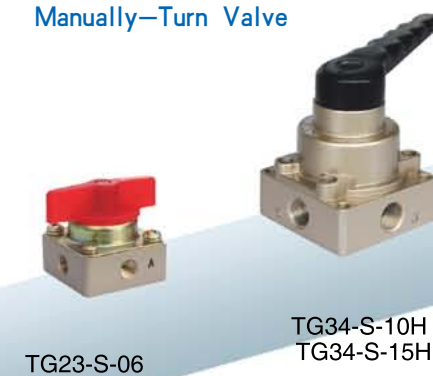

TG Series Manually-Turn Valve

Pressure: 0-0.8MPa



2 Positions/3 Ports Mechanical Valve




2 Positions/3 Ports Mechanical Valve



2 Positions/5 Ports Mechanical Valve



2 Positions/5 Ports Foot Valve

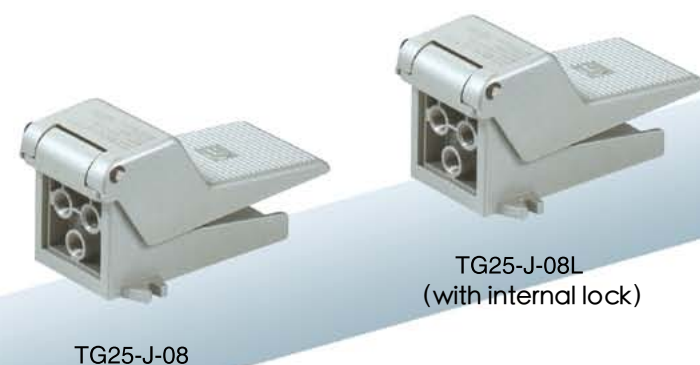

Air-control Check Valve



Check Valve



Mechanical Valve



2 Positions/3 Ports
2 Positions/4 Ports Foot Valve



2 Positions/5 Ports Valve With Protective Shield



Speed Control Valve



SV-01
SV-02
SV-03
SV-04
(metal seal)

ST-01
ST-02
ST-03
ST-04
ST-06
ST-10

Hand Slipping Valve



SH-M5
SH-06
SH-08

SH-10
SH-15

Shocking Equipment



VK-08
VK-16

VK-20
VK-36

Shuttle Valve



KV-06
KV-08
KV-10
KV-15
KV-20
KV-25

Vacuum Valve



ZK-06
ZK-08
ZK-10

Vehide gas value



TX-1T
TX-2T

TX-3T
TX-4T

TG2311D-10F

Quick Exhaust Valve



QV-06
QV-08
QV-10
QV-15
QV-20
QV-25



XQ-M5
XQ170600
XQ170800
XQ171000
XQ171500

The valve has fantastic outlook, credible function, and more durable! It is suitable for the automation field, many specifications to choose!

TD Series Pilot Solenoid Valve



TD-06

TD-08

TD-10

TD-15

PK Series Solenoid Valve



TF-06
TF-08

PK-06
PK-08

TF Series Solenoid Valve



TUV-10
TUV-15
TUV-20
TUV-25

TUV-35
TUV-40
TUV-50

TE Series Diaphragm Solenoid Valve



TE-10
TE-15

TE-20
TE-25

UWK Series Normally-Open Valve



UWK-10
UWK-15

UWK-20
UWK-25

Simulation and Figure Electric Timer



XY-720



XY-711

HLP Series Pressure Controller



HLP530M
HLP110
HLP506
HLP506M



HLP830M
HLP830HLM



Pressure antroiler
TPM11-NO
TPM11-NC

TWS Stainless steel Solenoid Valve



TWS-10
TWS-15
TWS-20
TWS-25




TWS-35
TWS-40
TWS-50

ZF Series Angel Valve




ZF Series Angel Valve

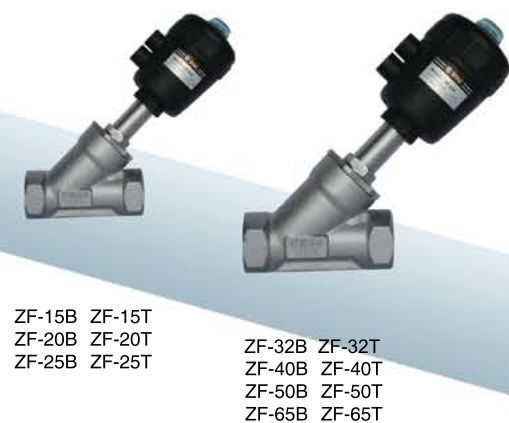


UM Series Pulse Valve




UH Series High Pressure Valve

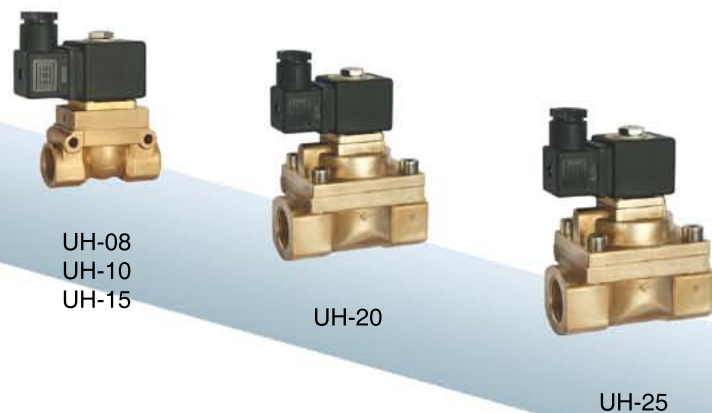




TUS Series High-temperature Solenoid Valve

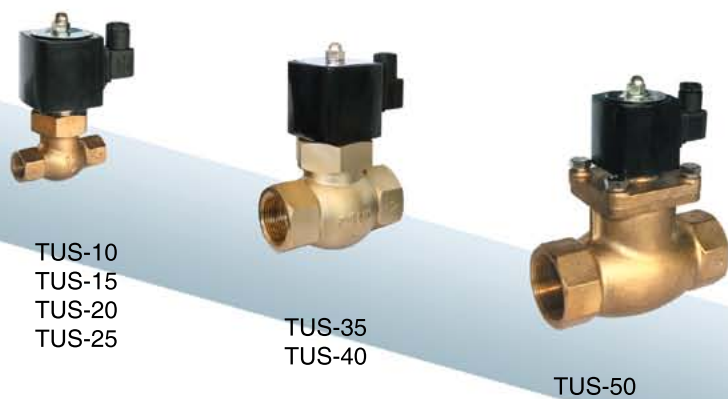

UME Series Flooding Valve


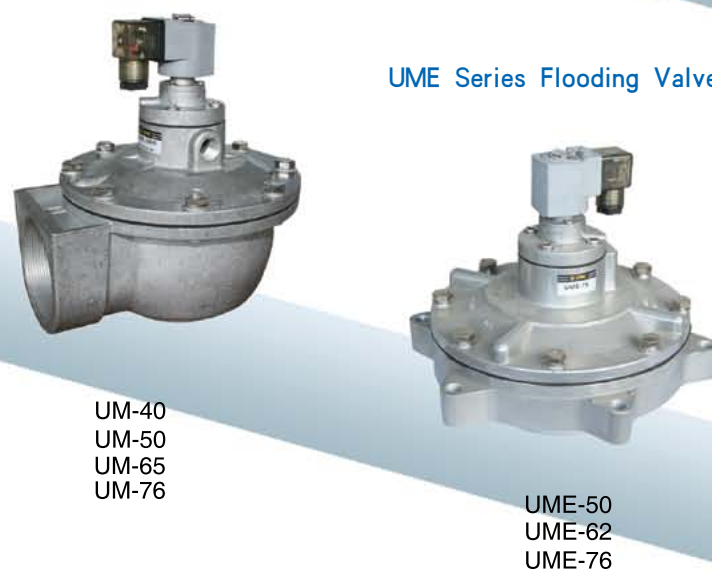


Coil

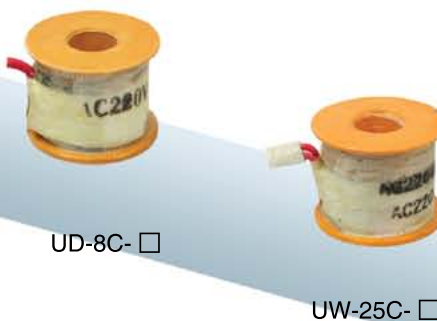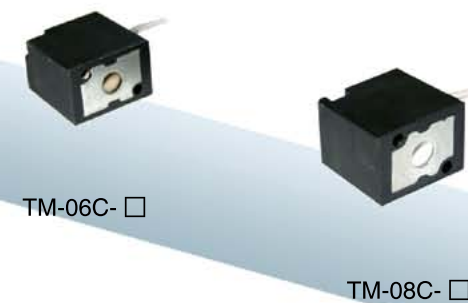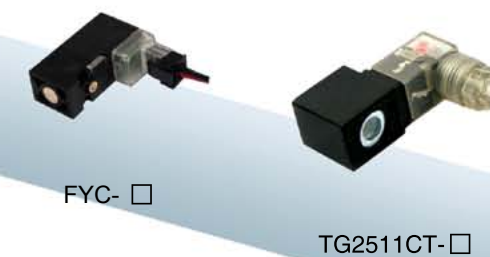

Ordering Code

TG2521	C	T	AC220V
Specification	Coil	Plug Mode: No Mark : Lead Wire T : DIN Terminal L : LED Indicator	Standard Voltage

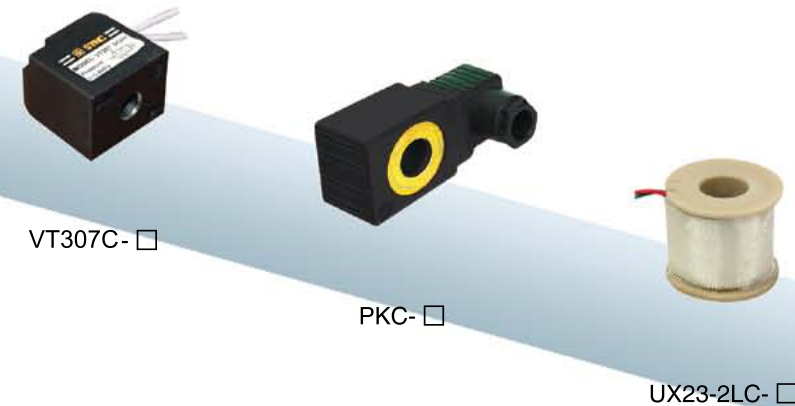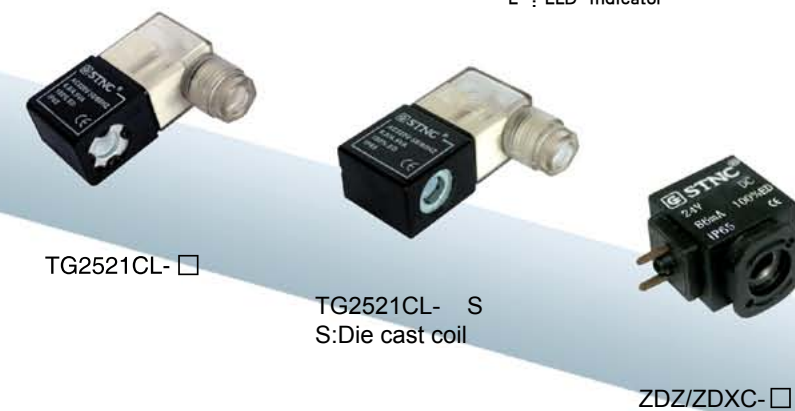

Armature of TG series



TG series


The stem of FG series




Diaphragm



Armature of other solenoid valves' series

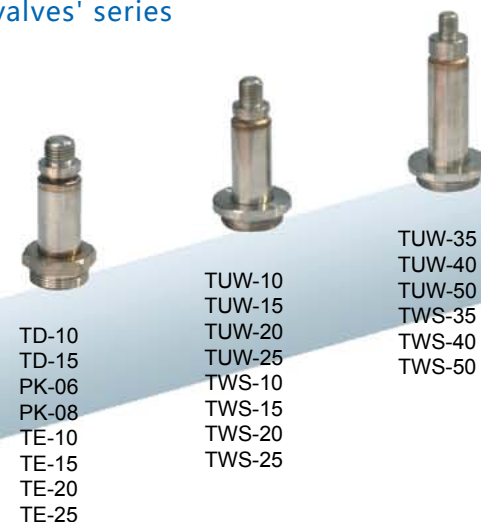

Flat ring

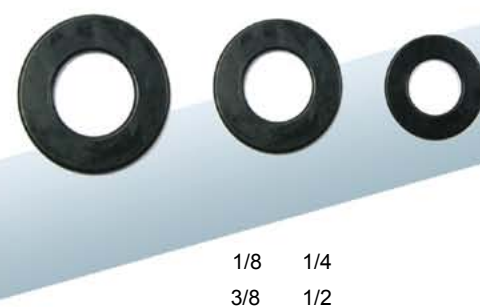

TGD Series Standard Cylinder(ISO6431)
Bore size: 32-125

Environment-friendly



● Ordering Code




TGI Series Standard Cylinder(ISO6431)
Bore size: 32-200

Environment-friendly



● Ordering Code

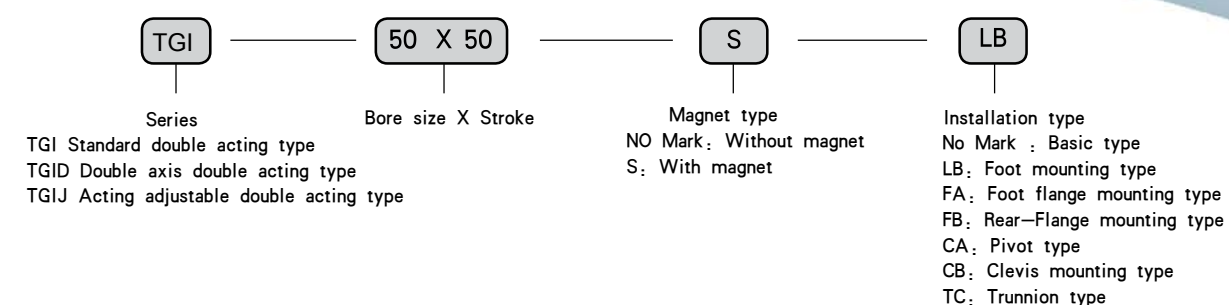


TGC、TGU Series Standard Cylinder(TGC : Profile、TGU : Tie-rod)

Bore size: 32—200mm

Environment-friendly



● Ordering Code

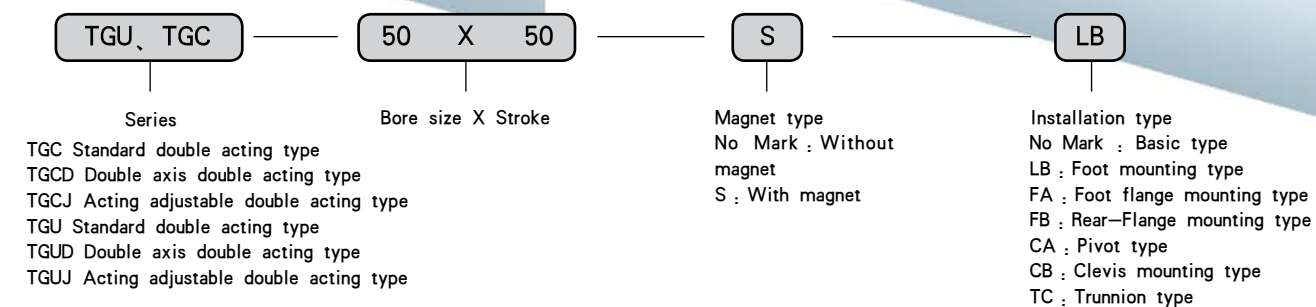


TGF Series Door Pump Cylinder

Bore size: $\Phi 63$ $\Phi 80$ $\Phi 125$



● Ordering Code

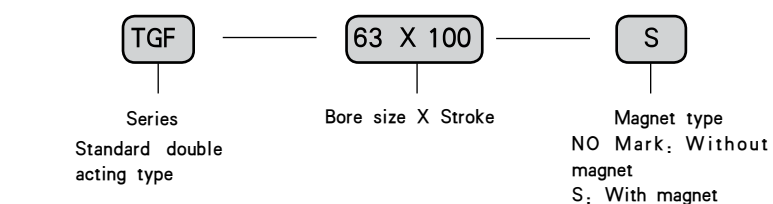

TGIC Series big size cylinder(ISO6431)

Bore size : $\Phi 250$ $\Phi 320$


Environment-friendly

TGL Series Micro Cylinder(ISO6432)

Bore size: 8—25



● Ordering Code

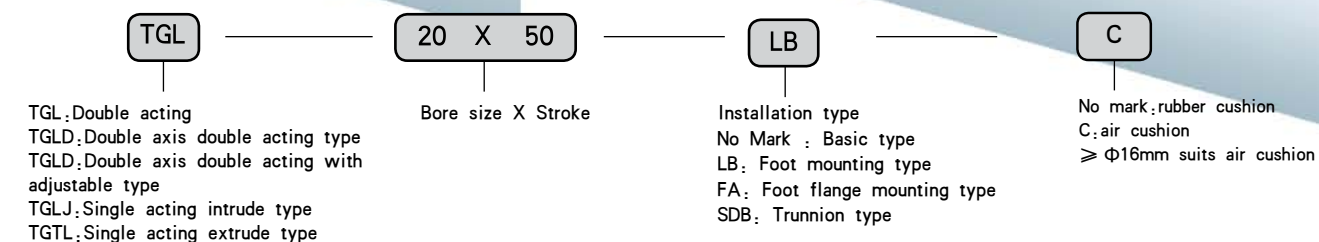


TMN Clamp Cylinder series

Bore size: $\Phi 50$ — $\Phi 63$




● Ordering Code

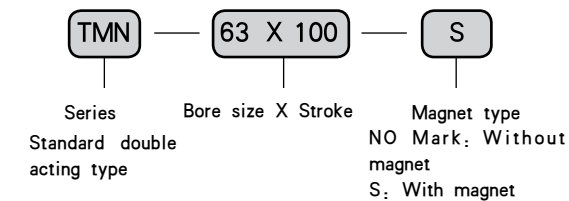

TGM Series Cylinder(Aluminum tube) Bore size : 20—40mm



● Ordering Code

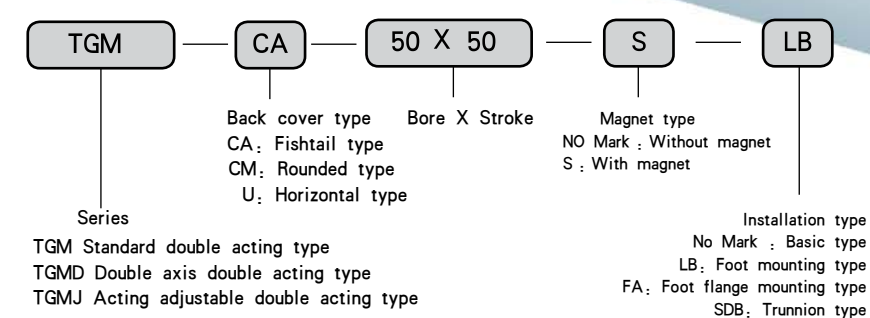


THZ Series Cylinder



THZ4-3

THZ6x18-8


● Ordering Code

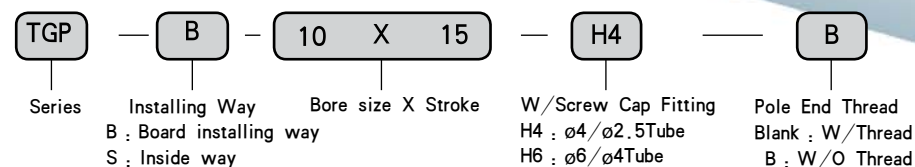

TGN Series Compact Cylinder Bore size : 12-100mm



● Ordering Code

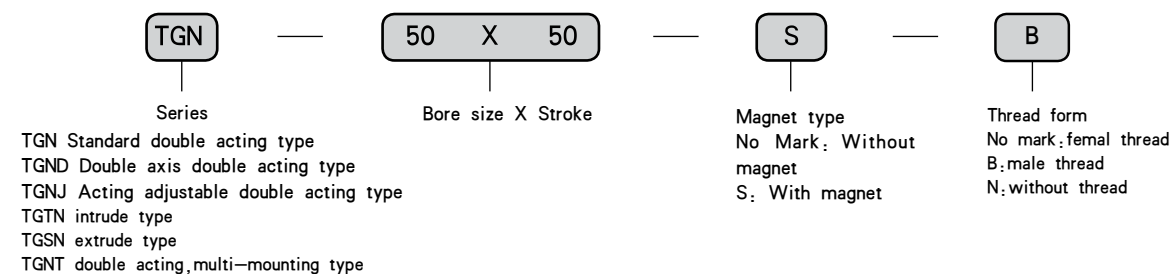


※ The MAX stroke of single acting cylinder is 50mm, with the max bore of 63

CQ2 Series Compact Cylinder




● Ordering Code

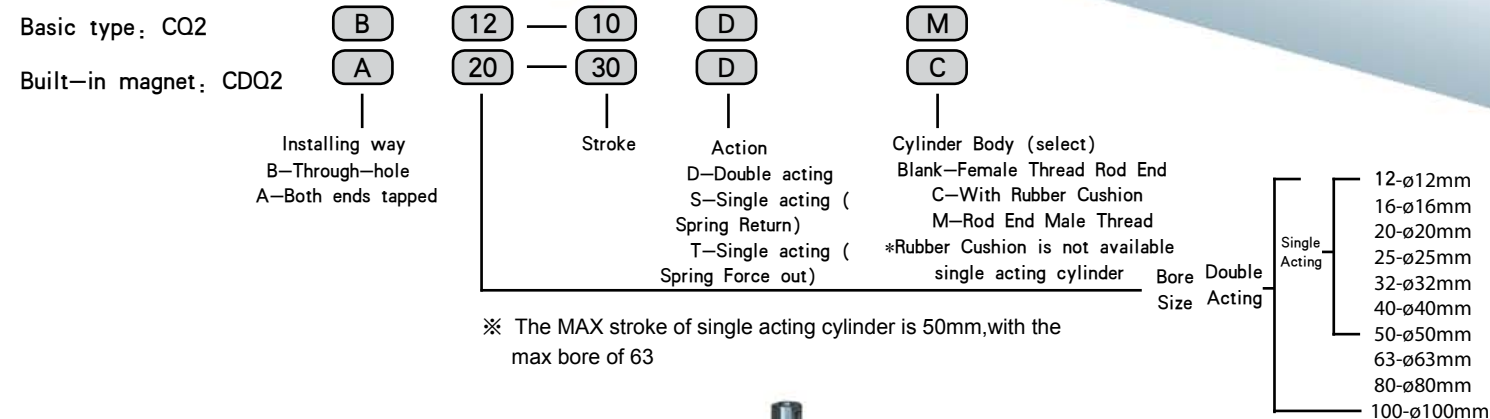

ACP series of compact cylinder



● Ordering Code

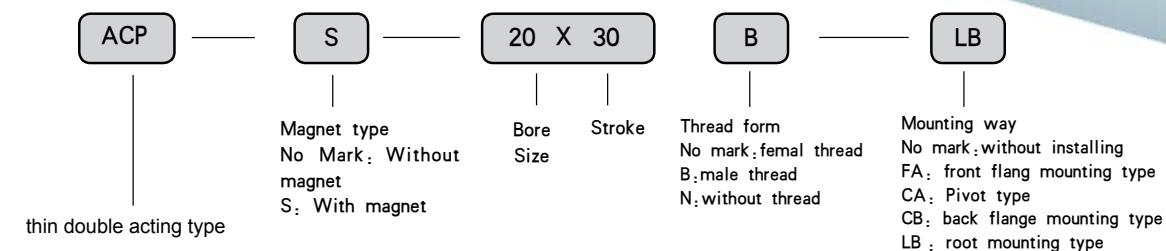

CU Series Free-mounting cylinder



● Ordering Code

Basic type: CU

Built-in magnet: CDU

Type
 Blank-Basic type
 K-no rotate piston rod

—
 Bore Size
 6-ø6mm
 10-ø10mm
 16-ø16mm
 20-ø20mm
 25-ø25mm
 32-ø32mm

—
 Stroke

Action
 D-Double acting
 S-Single acting (Spring Return)
 T-Single acting (Spring Force out)

CUJ Series Minitype Free-mounting cylinder



● Ordering Code

Basic type: CUJB

Built-in magnet: CDUJB

—
 Bore Size
 4-ø4mm
 6-ø6mm
 8-ø8mm
 10-ø10mm
 *ø14mm Cylinder
 without magnet ring
 inside

—
 Stroke
 Action
 D-Double acting
 S-Single acting (Spring Return)

Type
 Blank-Female thread Rod End (ø4mm without thread)
 M-Rod End Male Thread

● Ordering Code

Built-in magnet: CXS

Bearing
 M-Slide bearing
 L-Ball bushing bearing

—
 Bore Size
 6-ø6mm
 10-ø10mm
 16-ø16mm
 20-ø20mm
 25-ø25mm
 32-ø32mm

*Cylinder can be firmed at 4 directions and selecting air-suplying port with screw.

CXSW Series Double Tubes cylinder



● Ordering Code

Built-in magnet: CXSW

Bearing
 M-Slide bearing
 L-Ball bushing bearing

—
 Bore Size
 6-ø6mm
 10-ø10mm
 16-ø16mm
 20-ø20mm
 25-ø25mm
 32-ø32mm

Stroke

Long stroke code
 No mark: standard stroke
 XB11: long stroke

If order the long stroke cylinder, please add-XB11 code in rear (long stroke specification is in the right table)

MGP Series New Slim Guide



● Ordering Code

Built-in magnet: MGP

Bearing
 M-Slide bearing
 L-Ball bushing bearing

—
 Bore Size
 12-ø12mm
 16-ø16mm
 20-ø20mm
 25-ø25mm
 32-ø32mm
 40-ø40mm
 50-ø50mm
 63-ø63mm
 80-ø80mm
 100-ø100mm

Stroke

MH Series Air Gripper



● Ordering Code

little mode : MHZ2-6
 standard mode : MHZ2- 10 D
 dustproof mode : MHZJ2- 10 D F

bore
 6-φ6mm
 10-φ10mm
 16-φ16mm
 20-φ20mm
 25-φ25mm
 32-φ32mm
 40-φ40mm

Acting type
 D-Double acting
 S-single acting (normal open)
 C-single acting (normal close)

Dustproof gumsheath material
 No mark-neoprene
 F-FKM
 S-Si

● Ordering Code

MHC2 - 10 D

bore
 6-φ6mm
 10-φ10mm
 16-φ16mm
 20-φ20mm
 25-φ25mm

Acting type
 D-Double acting
 S-single acting (normal open)

MHL2 Series Broad Type Air Gripper (Paralled Open Close Type)



● Ordering Code

MHL2 - 16 D

Bore Size
 10-φ10mm
 16-φ16mm
 20-φ20mm
 25-φ25mm
 32-φ32mm
 40-φ40mm

Finger open/Close stroke

mark	φ10	φ16	φ20	φ25	φ32	φ40
with mark	20	30	40	50	70	100
1	40	60	80	100	120	160
2	60	80	100	120	160	200

MHY2 Series Minitype 180° Air Gripper



● Ordering Code

Built-in magnet: MHY2 - 20 D

Bore Size
 10-φ10mm
 16-φ16mm
 20-φ20mm
 25-φ25mm

Acting type
 D-Double acting
 S-single acting (normal open)

Swing Clamp Cylinder (Φ25-Φ63)



● Ordering Code

TJ × 40 - 15 - D

series
 TJ: right fixation (left-right)
 TJ: Left fixation (right-left)

bore
 25: φ25mm
 32: φ32mm
 40: φ40mm
 50: φ50mm
 63: φ63mm

stroke
 φ25-13mm
 φ32-15mm
 φ40-15mm
 φ50-20mm
 φ63-20mm

Clamp
 D: double side clamp arm
 Blank: single side clamp arm
 φ25 no double side clamp arm

MSQ series turning swing cylinder(Normal/precision) (Bore: Φ10-200)



● Ordering Code

MSQ - B - 10 - A

A: Precision
 B: Normal

Size code
 10 70
 20 100
 30 200
 50

A: with angle adjustable bolt
 B: With shock absorber

TGH Series Stopper Cylinder Bore Size: 50-63



● Ordering Code

TGH - 50 X 25

series
 Standard double acting

Bore Size X Stroke

RSQ Series Fixed Stroke Rod Cylinder



● Ordering Code

Basic type: RSQ B 20 - 15 D R
 Built-in magnet: RSDQ B 20 - 15 D R

Installing way
 B-through-hole
 A-both end stapped style

Bore Size
 20-φ20mm
 32-φ32mm
 40-φ40mm
 50-φ50mm

Stroke
 15-15mm
 20-20mm
 30-30mm
 40-40mm
 50-50mm

Action
 D-Double acting
 B-Double acting (spring type)
 T-Single acting (Spring Force out)

Fixed Stroke rod style
 Blank-Round bar type (φ20-φ50)
 K-Chamfered type (φ20-φ50)
 R-Roller type (φ20-φ50)
 L-Lever type (with energy absorbing) (φ32-φ50)
 B-Lever type (adjustable energy absorbing) (φ32-φ50)

C-Lever type (adjustable shock absorber, with temporary cancel equipment) (φ32-φ50)
 D-Lever type (adjustable shock absorber, with auto lock equipment) (φ32-φ50)
 E-Lever type (adjustable shock absorber, with temporary cancel equipment and auto-lock equipment) (φ32-φ50)


Shock Absorber



Ordering Code

HR — 30
 series — stroke
 precision adjustable mode 30:30mm
 60:60mm

Magnetic sensor switch

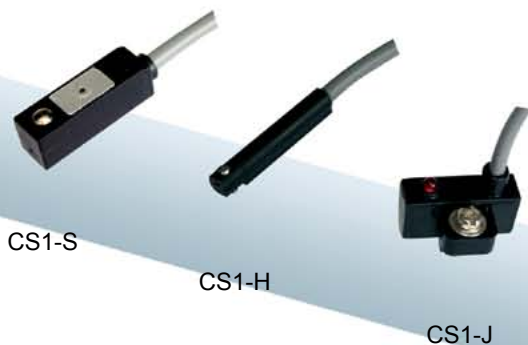

CS1-S


CS1-H

CS1-J

Fixed metal belt



BK PAB PBM

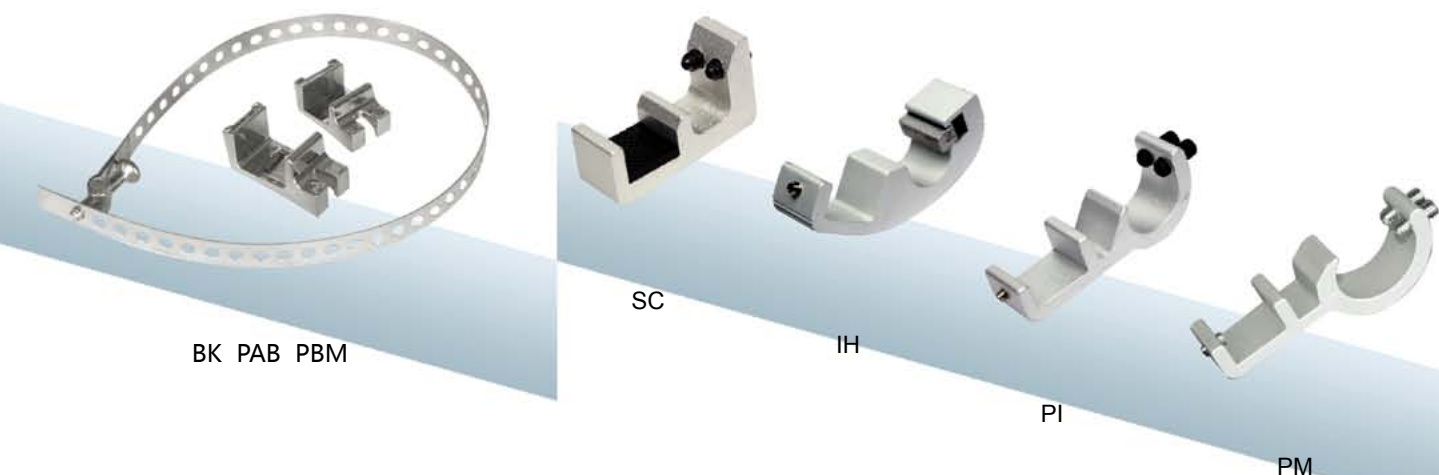

Fixed clamp

SC

IH


PI

PM

Ordering Code

AC — 14 — 16 — 1 — N
 Series — Bearing — Stroke — Strike Speed — Buffer Cap
 Auto Retrieve Outer Thread Way Regulated
 1: High Speed
 2: Middle Speed
 3: Slow Speed
 Blank: W/ Buffer Cap
 N: W/O Buffer Cap

Connection accessories

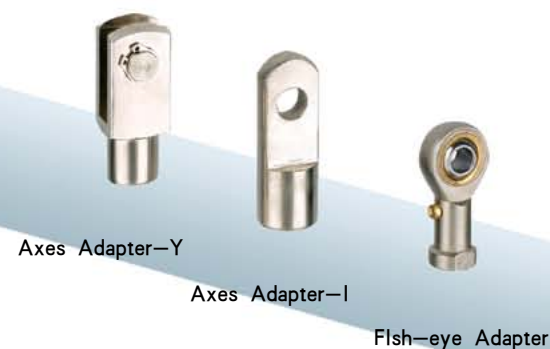


Axes Adapter-Y

Axes Adapter-I

Fish-eye Adapter

TGD/TGI series cylinder accessories

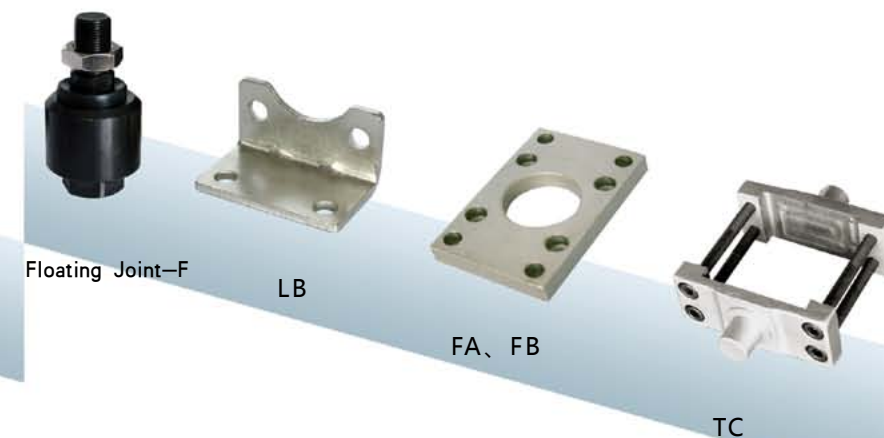


Floating Joint-F

LB

FA, FB

TC

TGC/TGU series cylinder accessories

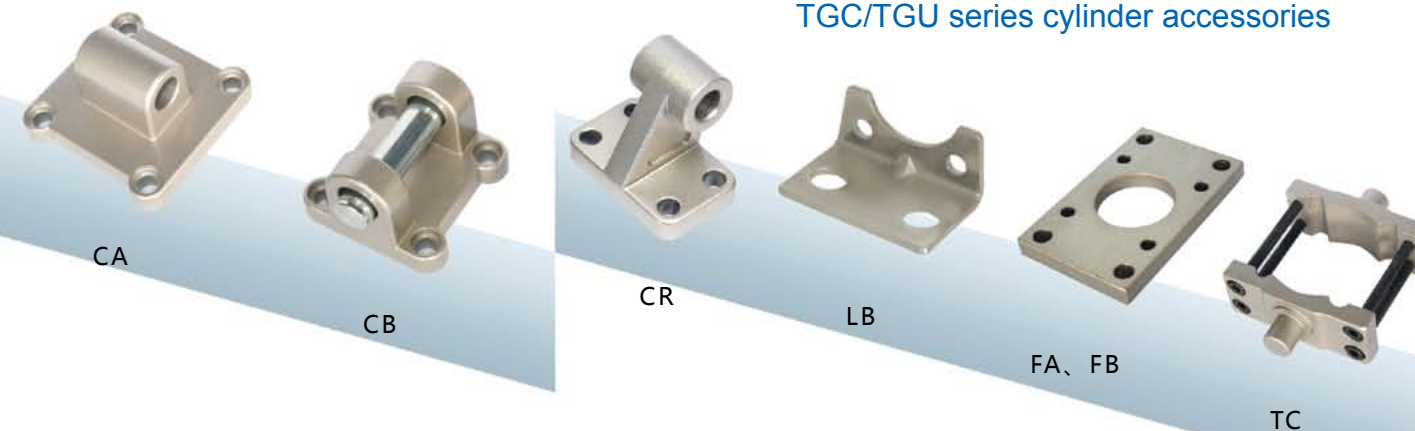

CA

CB


CR

LB

FA, FB

TC


TGC/TGU series cylinder accessories

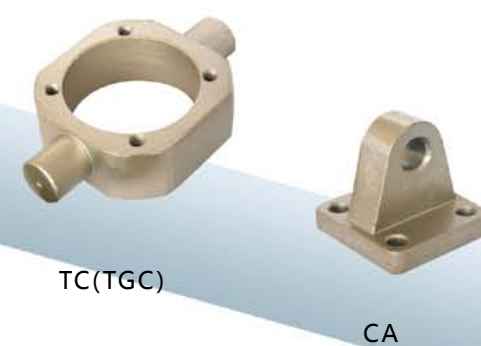

TC(TGC)

CA

TGA/TGM/TGL series cylinder accessories

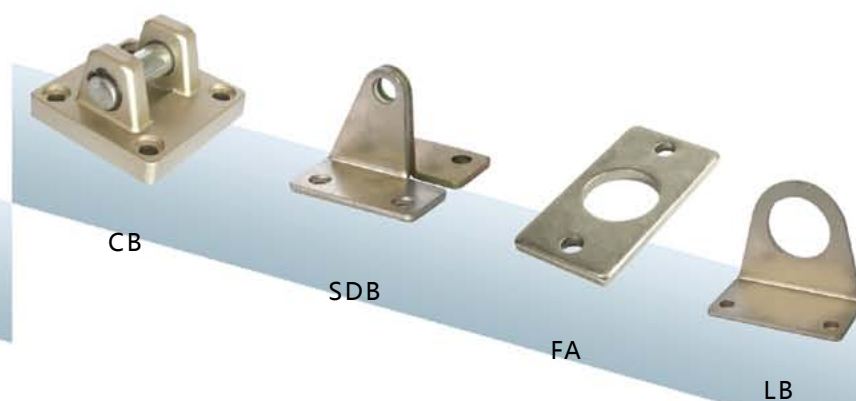

CB

SDB

FA

LB

Piston rod




45 piston rod/304 piston rod

Tube



TGU/TGI Mickey mouse Aluminum Tube

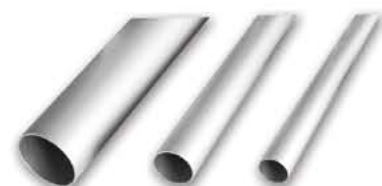

TGC Round Aluminum Tube



TGD/ACP Square Aluminum Tube



CQ2 Aluminum Tube



TGN Aluminum Tube




TGL Stainless Steel Round Tube



Tie rod

TGC series
TGI series

Cylinder assembly kits

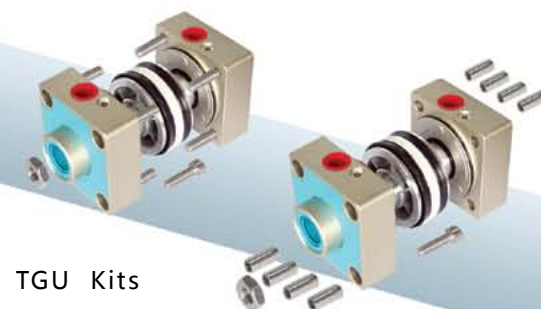

TGU Kits


TGC Kits



TGD Kits (For Square Tube
Bore size: $\Phi 32$ - $\Phi 50$)
(ISO6431)

TGD Kits (For Square Tube
Bore size: $\Phi 63$ - $\Phi 100$)
(ISO6431)

TGI Kits
(For Mickey Mouse Tube
Tie Rod Type, Bore Size
 $\Phi 32$ - $\Phi 200$) (ISO6431)

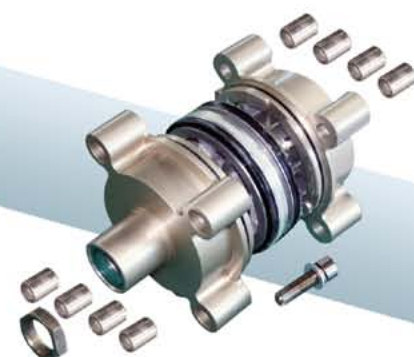

TGIC Kits
(Bore size: $\Phi 250$ - $\Phi 320$)



TGN Kits

TGM Kits

TGL Kits
(ISO6432)

Characteristics:

1. Fleetness install, simple and clever, space saving.
2. Pattern variety, meet any needs in installation of pneumatic Tubes.
3. Plastic Tubes can be turned feely after installation.
4. The release button adopted with the oval design, take down more labor-saving and conveniently
5. All cone tube threads covered with Teflon airproof gum have high sealed performance.
6. With internal hexagon thread, all straight fittings of YPC type are easy to be installed in narrow positions.

Ordering Code

Y - PC 8 - 01
Y : White (brass) Type tube O.D Thread
T : Black (steel)

Quick Coupler

①Type		②Male Diameter of Hose				
Serial Number	4	6	8	10	12	
Caliber	$\phi 4$	$\phi 6$	$\phi 8$	$\phi 10$	$\phi 12$	
③Style and Dimension of Screw Thread						
Metric Screw Thread						
Serial Number	M5	M6	M8	M10	M12	M12A
Style	M5x0.8	M6x1	M8x1	M10x1	M12x1.25	M12x1.5
Cone Tube Thread						
Serial Number	01	02	03	04		
Style	R1/8	R1/4	R3/8	R1/2		
Cone Tube Thread						
Serial Number	G01	G02	G03	G04		
Style	G1/8	G1/4	G3/8	G1/2		

Screw thread straight union		Screw thread double union L		Extended male elbow		Male branch tee		Male run tee		Branch Y	
YPC4-M5	YPC8-03	YPL4-M5	YPL12-04	YPLL4-M5	YPLL8-03	YPB4-M5	YPB8-03	YPD4-M5	YPD8-03	YPX4-M5	YPX8-03
YPC4-01	YPC8-04	YPL4-01	YPL8-02	YPLL4-01	YPLL8-04	YPB4-01	YPB8-04	YPD4-01	YPD8-04	YPX4-01	YPX8-04
YPC4-02	YPC10-01	YPL4-02	YPL8-03	YPLL4-02	YPLL10-01	YPB4-02	YPB10-01	YPD4-02	YPD10-01	YPX4-02	YPX10-01
YPC6-M5	YPC10-02	YPL6-M5	YPL8-04	YPLL6-M5	YPLL10-02	YPB6-M5	YPB10-02	YPD6-M5	YPD10-02	YPX6-M5	YPX10-02
YPC6-01	YPC10-03	YPL6-01	YPL10-01	YPLL6-01	YPLL10-03	YPB6-01	YPB10-03	YPD6-01	YPD10-03	YPX6-01	YPX10-03
YPC6-02	YPC10-04	YPL6-02	YPL10-02	YPLL6-02	YPLL10-04	YPB6-02	YPB10-04	YPD6-02	YPD10-04	YPX6-02	YPX10-04
YPC6-03	YPC12-02	YPL6-03	YPL10-03	YPLL6-03	YPLL12-02	YPB6-03	YPB12-02	YPD6-03	YPD12-02	YPX6-03	YPX12-02
YPC6-04	YPC12-03	YPL6-04	YPL10-04	YPLL6-04	YPLL12-03	YPB6-04	YPB12-03	YPD6-04	YPD12-03	YPX6-04	YPX12-03
YPC8-01	YPC12-04	YPL8-01	YPL12-02	YPLL8-01	YPLL12-04	YPB8-01	YPB12-04	YPD8-01	YPD12-04	YPX8-01	YPX12-04
YPC8-02	YPC16-03	YPL12-03	YPL16-03	YPLL12-02	YPLL16-04	YPB8-02	YPB16-03	YPD8-02	YPD16-03	YPX8-02	YPX16-03
YPC8-02	YPC16-04	YPL12-03	YPL16-04	YPLL8-02	YPLL16-04	YPB8-02	YPB16-04	YPD8-02	YPD16-04	YPX8-02	YPX16-04

Hexagon socket head universal male elbow		Universal female elbow		Female elbow		Female connector		Speed controller		Different dia. union L	
YPH4-M5	YPH8-03	YPHF4-M5	YPHF8-03	YPLF4-M5	YPLF8-03	YPCF4-M5	YPCF8-03	YSC4-M5	YSC8-03	YPLGJ 6-4	YPLGJ 8-4
YPH4-01	YPH8-04	YPHF4-01	YPHF8-04	YPLF4-01	YPLF8-04	YPCF4-01	YPCF8-04	YSC4-01	YSC8-04	YPLGJ 8-6	YPLGJ 10-6
YPH4-02	YPH10-01	YPHF4-02	YPHF10-01	YPLF4-02	YPLF10-01	YPCF4-02	YPCF10-01	YSC4-02	YSC10-01	YPLGJ 10-8	YPLGJ 12-8
YPH6-M5	YPH10-02	YPHF6-M5	YPHF10-02	YPLF6-M5	YPLF10-02	YPCF6-M5	YPCF10-02	YSC6-M5	YSC10-02	YPLGJ 12-8	YPLGJ 12-10
YPH6-01	YPH10-03	YPHF6-01	YPHF10-03	YPLF6-01	YPLF10-03	YPCF6-01	YPCF10-03	YSC6-01	YSC10-03		
YPH6-02	YPH10-04	YPHF6-02	YPHF10-04	YPLF6-02	YPLF10-04	YPCF6-02	YPCF10-04	YSC6-02	YSC10-04		
YPH6-03	YPH12-02	YPHF6-03	YPHF12-02	YPLF6-03	YPLF12-02	YPCF6-03	YPCF12-02	YSC6-03	YSC12-02		
YPH6-04	YPH12-03	YPHF6-04	YPHF12-03	YPLF6-04	YPLF12-03	YPCF6-04	YPCF12-03	YSC6-04	YSC12-03		
YPH8-01	YPH12-04	YPHF8-01	YPHF12-04	YPLF8-01	YPLF12-04	YPCF8-01	YPCF12-04	YSC8-01	YSC12-04		
YPH8-02		YPHF8-02		YPLF8-02		YPCF8-02		YSC8-02			

Union Tee		YPEG Diff. Diam Union Tee A		YPEW Diff. Diam Union Tee B		Union Y		YPYW Diff. Diam Union Y		Union L	
YPE-4	YPE-10	YPEG6-4	YPEG12-10	YPEW6-4	YPEW12-10	YPY 4	YPY 10	YPYW6-4	YPYW12-10	YPV 4	YPV 10
YPE-6	YPE-12	YPEG8-6	YPEG16-12	YPEW8-6	YPEW16-12	YPY 6	YPY 12	YPYW8-6	YPYW16-12	YPV 6	YPV 12
YPE-8	YPE-16	YPEG10-8		YPEW10-8		YPY 8	YPY 16	YPYW10-8		YPV 8	YPV 16

Plug		Straight union		Bulkhead union		Cross		Different dia. triple union		Triple union	
YPP 4	YPP 10	YPU 4	YPU 10	YPM 4	YPM 10	YPZA-4	YPZA-10	YPKG 6-4	YPKG 8-4	YPK 4	YPK 6
YPP 6	YPP 12	YPU 6	YPU 12	YPM 6	YPM 12	YPZA-6	YPZA-12	YPKG 8-6	YPKG 10-6	YPK 8	YPK 10
YPP 8		YPU 8	YPU 16	YPM 8		YPZA-8	YPZA-16	YPKG 10-8		YPK 12	



Different dia. triple universal male elbow

YPKD 6-4-01 YPKD 10-8-02
YPKD 6-4-02 YPKD 10-8-03
YPKD 6-4-03 YPKD 10-8-04
YPKD 8-6-01 YPKD 12-10-02
YPKD 8-6-02 YPKD 12-10-03
YPKD 8-6-03 YPKD 12-10-04



triple universal male elbow

YPKB 4-01 YPKB 6-03
YPKB 4-02 YPKB 8-01
YPKB 6-01 YPKB 8-02
YPKB 6-02 YPKB 8-03



Different dia. tee

YPEGJ 6-4 YPEGJ 10-8
YPEGJ 8-4 YPEGJ 12-8
YPEGJ 8-6 YPEGJ 12-10
YPEGJ 10-6



Different dia. straight

YPG 6-4
YPG 8-6
YPG 10-8
YPG 12-10



Plug-in reducer

YPGJ 6-4 YPGJ 10-8
YPGJ 8-4 YPGJ 12-6
YPGJ 8-6 YPGJ 12-8
YPGJ 10-6 YPGJ 12-10



Different dia. union Y

YPWJ 6-4 YPWJ 10-8
YPWJ 8-4 YPWJ 12-8
YPWJ 8-6 YPWJ 12-10
YPWJ 10-6



Double union L

YPLJ04
YPLJ06
YPLJ08
YPLJ10
YPLJ12

Metric size—G thread fitting



PC—G

PC 04-G01 PC 10-G01
PC 04-G02 PC 10-G02
PC 04-G03 PC 10-G03
PC 06-G02 PC 10-G04
PC 06-G03 PC 12-G01
PC 06-G04 PC 12-G02
PC 08-G01 PC 12-G03
PC 08-G02 PC 12-G04
PC 08-G03 PC 16-G03
PC 08-G04 PC 16-G04



PL—G

PL 04-G01 PL 10-G01
PL 04-G02 PL 10-G02
PL 06-G01 PL 10-G03
PL 06-G02 PL 10-G04
PL 06-G03 PL 12-G01
PL 06-G04 PL 12-G02
PL 08-G01 PL 12-G03
PL 08-G02 PL 12-G04
PL 08-G03 PL 16-G03
PL 08-G04 PL 16-G04



PT—G

PT 04-G01 PT 10-G01
PT 04-G02 PT 10-G02
PT 06-G01 PT 10-G03
PT 06-G02 PT 10-G04
PT 06-G03 PT 12-G02
PT 08-G01 PT 12-G03
PT 08-G02 PT 12-G04
PT 08-G03 PT 16-G03
PT 08-G04 PT 16-G04



PH—G

PH 04-G01 PH 08-G04
PH 04-G02 PH 10-G01
PH 06-G01 PH 10-G02
PH 06-G02 PH 10-G03
PH 06-G03 PH 10-G04
PH 08-G01 PH 12-G02
PH 08-G02 PH 12-G03
PH 08-G03 PH 12-G04



PST—G

PST 04-G01 PST 10-G01
PST 04-G02 PST 10-G02
PST 06-G01 PST 10-G03
PST 06-G02 PST 10-G04
PST 06-G03 PST 12-G02
PST 08-G01 PST 12-G03
PST 08-G02 PST 12-G04
PST 08-G03 PST 16-G03
PST 08-G04 PST 16-G04



PWT—G

PWT 04-G01 PWT 10-G01
PWT 04-G02 PWT 10-G02
PWT 06-G01 PWT 10-G03
PWT 06-G02 PWT 10-G04
PWT 06-G03 PWT 12-G02
PWT 08-G01 PWT 12-G03
PWT 08-G02 PWT 12-G04
PWT 08-G03 PWT 16-G03
PWT 08-G04 PWT 16-G04



PLF—G

PLF 04-G01 PLF 08-G04
PLF 04-G02 PLF 10-G02
PLF 06-G01 PLF 10-G03
PLF 06-G02 PLF 10-G04
PLF 06-G03 PLF 12-G02
PLF 08-G01 PLF 12-G03
PLF 08-G02 PLF 12-G04
PLF 08-G03 PLF 12-G04



PCF—G

PCF 04-G01 PCF 08-G04
PCF 04-G02 PCF 10-G01
PCF 06-G01 PCF 10-G02
PCF 06-G02 PCF 10-G03
PCF 06-G03 PCF 12-G02
PCF 08-G01 PCF 12-G02
PCF 08-G02 PCF 12-G04
PCF 08-G03 PCF 12-G04



PLL—G

PLL 04-G01 PLL 10-G01
PLL 04-G02 PLL 10-G02
PLL 06-G01 PLL 10-G03
PLL 06-G02 PLL 10-G04
PLL 06-G03 PLL 12-G02
PLL 08-G01 PLL 12-G03
PLL 08-G02 PLL 12-G04
PLL 08-G03 PLL 16-G03
PLL 08-G04 PLL 16-G04



PHF—G

PHF 04-G01 PHF 08-G04
PHF 04-G02 PHF 10-G01
PHF 06-G01 PHF 10-G02
PHF 06-G02 PHF 10-G03
PHF 06-G03 PHF 10-G04
PHF 08-G01 PHF 12-G02
PHF 08-G02 PHF 12-G03
PHF 08-G03 PHF 12-G04



PKD—G

PKD 04-G01 PKD 08-G04
PKD 04-G02 PKD 10-G01
PKD 06-G01 PKD 10-G02
PKD 06-G02 PKD 10-G03
PKD 06-G03 PKD 10-G04
PKD 08-G01 PKD 12-G02
PKD 08-G02 PKD 12-G03
PKD 08-G03 PKD 12-G04



NSE—G

NSE 04-G01 NSE 08-G04
NSE 04-G02 NSE 10-G01
NSE 06-G01 NSE 10-G02
NSE 06-G02 NSE 10-G03
NSE 06-G03 NSE 12-G02
NSE 08-G01 NSE 12-G02
NSE 08-G02 NSE 12-G03
NSE 08-G03 NSE 12-G04

Non-returning throtte valve

Hand valve



NSF4 NSF6
NSF8 NSF10
NSF12



NASF01-04 NASF04-10 NASF08-02
NASF01-06 NASF02-12 NASF08-03
NASF02-06 NASF03-12 NASF10-02
NASF01-08 NASF04-12 NASF10-03
NASF02-08 NASF06-01 NASF10-04
NASF03-08 NASF08-01 NASF12-02
NASF02-10 NASF06-02 NASF12-03
NASF03-10 NASF08-01 NASF12-04



HVFF6-06B HVFF6-06
HVFF8-08B HVFF8-08
HVFF10-10B HVFF10-10
HVFF12-10B HVFF12-10
HVFF12-12B HVFF12-12



HVSS01-01B HVSS01-01
HVSS02-01B HVSS02-01
HVSS02-02B HVSS02-02
HVSS03-02B HVSS03-02
HVSS03-03B HVSS03-03
HVSS04-03B HVSS04-03
HVSS04-04B HVSS04-04



YHVSF01-06B YHVSF01-06
YHVSF02-06B YHVSF02-06
YHVSF03-06B YHVSF03-06
YHVSF01-08B YHVSF01-08
YHVSF02-08B YHVSF02-08
YHVSF03-08B YHVSF03-08
YHVSF02-10B YHVSF02-10
YHVSF03-10B YHVSF03-10
YHVSF04-10B YHVSF04-10
YHVSF02-12B YHVSF02-12
YHVSF03-12B YHVSF03-12
YHVSF04-12B YHVSF04-12



YHVS06-01B YHVS06-01
YHVS06-02B YHVS06-02
YHVS06-03B YHVS06-03
YHVS08-01B YHVS08-01
YHVS08-02B YHVS08-02
YHVS08-03B YHVS08-03
YHVS10-02B YHVS10-02
YHVS10-03B YHVS10-03
YHVS11-04B YHVS11-04
YHVS12-02B YHVS12-02
YHVS12-03B YHVS12-03
YHVS12-04B YHVS12-04

Non-returning throtte valve

Hand valve



YNSF4 YNSF6
YNSF8 YNSF10
YNSF12



YNASF01-04 YNASF04-10 YNASF08-02
YNASF01-06 YNASF02-12 YNASF08-03
YNASF02-06 YNASF03-12 YNASF10-02
YNASF01-08 YNASF04-12 YNASF10-03
YNASF02-08 YNASF04-01 YNASF10-04
YNASF03-08 YNASF06-01 YNASF12-02
YNASF02-10 YNASF06-02 YNASF12-03
YNASF03-10 YNASF08-01 YNASF12-04



YHVFF6-06B YHVFF6-06
YHVFF8-06B YHVFF8-06
YHVFF8-08B YHVFF8-08
YHVFF10-10B YHVFF10-10
YHVFF12-10B YHVFF12-10
YHVFF12-12B YHVFF12-12



YHVSS01-01B YHVSS01-01
YHVSS02-01B YHVSS02-01
YHVSS02-02B YHVSS02-02
YHVSS03-02B YHVSS03-02
YHVSS03-03B YHVSS03-03
YHVSS04-03B YHVSS04-03
YHVSS04-04B YHVSS04-04



YHVSF01-06B YHVSF01-06
YHVSF02-06B YHVSF02-06
YHVSF03-06B YHVSF03-06
YHVSF01-08B YHVSF01-08
YHVSF02-08B YHVSF02-08
YHVSF03-08B YHVSF03-08
YHVSF02-10B YHVSF02-10
YHVSF03-10B YHVSF03-10
YHVSF04-10B YHVSF04-10
YHVSF02-12B YHVSF02-12
YHVSF03-12B YHVSF03-12
YHVSF04-12B YHVSF04-12



YHVS06-01B YHVS06-01
YHVS06-02B YHVS06-02
YHVS06-03B YHVS06-03
YHVS08-01B YHVS08-01
YHVS08-02B YHVS08-02
YHVS08-03B YHVS08-03
YHVS10-02B YHVS10-02
YHVS10-03B YHVS10-03
YHVS11-04B YHVS11-04
YHVS12-02B YHVS12-02
YHVS12-03B YHVS12-03
YHVS12-04B YHVS12-04

※ The above fittings code with B means union, without B means Tee

Non-returning throtte valve / hand valve(with O-ring)



YNASF01-04B YNASF04-10B YNASF08-02B
YNASF01-06B YNASF02-12B YNASF08-03B
YNASF02-06B YNASF03-12B YNASF10-02B
YNASF01-08B YNASF04-12B YNASF10-03B
YNASF02-08B YNASF04-01B YNASF10-04B
YNASF03-08B YNASF06-01B YNASF12-02B
YNASF02-10B YNASF06-02B YNASF12-03B
YNASF03-10B YNASF08-01B YNASF12-04B



YHVSS01-01B YHVSS01-01
YHVSS02-01B YHVSS02-01
YHVSS02-02B YHVSS02-02
YHVSS03-02B YHVSS03-02
YHVSS03-03B YHVSS03-03
YHVSS04-03B YHVSS04-03
YHVSS04-04B YHVSS04-04



YHVSF01-06B YHVSF01-06
YHVSF02-06B YHVSF02-06
YHVSF03-06B YHVSF03-06
YHVSF01-08B YHVSF01-08
YHVSF02-08B YHVSF02-08
YHVSF03-08B YHVSF03-08
YHVSF02-10B YHVSF02-10
YHVSF03-10B YHVSF03-10
YHVSF04-10B YHVSF04-10
YHVSF02-12B YHVSF02-12
YHVSF03-12B YHVSF03-12
YHVSF04-12B YHVSF04-12



YHVS06-01B YHVS06-01
YHVS06-02B YHVS06-02
YHVS06-03B YHVS06-03
YHVS08-01B YHVS08-01
YHVS08-02B YHVS08-02
YHVS08-03B YHVS08-03
YHVS10-02B YHVS10-02
YHVS10-03B YHVS10-03
YHVS11-04B YHVS11-04
YHVS12-02B YHVS12-02
YHVS12-03B YHVS12-03
YHVS12-04B YHVS12-04



NASF01-04B NASF04-10B NASF08-02B
NASF01-06B NASF02-12B NASF08-03B
NASF02-06B NASF03-12B NASF10-02B
NASF01-08B NASF04-12B NASF10-03B
NASF02-08B NASF04-01B NASF10-04B
NASF03-08B NASF06-01B NASF12-02B
NASF02-10B NASF06-02B NASF12-03B
NASF03-10B NASF08-01B NASF12-04B



YHVS01-01B YHVS01-01
YHVS02-01B YHVS02-01
YHVS02-02B YHVS02-02
YHVS03-02B YHVS03-02
YHVS03-03B YHVS03-03
YHVS04-03B YHVS04-03
YHVS04-04B YHVS04-04

※ The above fittings code with B means union, without B means Tee



HVSF01-06B HVSF01-06
HVSF02-06B HVSF02-06
HVSF03-06B HVSF03-06
HVSF01-08B HVSF01-08
HVSF02-08B HVSF02-08
HVSF03-08B HVSF03-08
HVSF02-10B HVSF02-10
HVSF03-10B HVSF03-10
HVSF04-10B HVSF04-10
HVSF02-12B HVSF02-12
HVSF03-12B HVSF03-12
HVSF04-12B HVSF04-12



Transitional Fitting(Brass)

 SP01 Blocking fitting 1/8 1/4 3/8 1/2 3/4 1	 SP02 Dyad male thread 1/8-1/8 1/2-1/4 1/4-1/8 1/2-3/8 1/4-1/4 1/2-1/2 3/8-1/8 3/4-1/2 3/8-1/4 3/4-3/4 3/8-3/8	 SP03 Dyad male thread 1/8-1/8 1/2-3/8 1/4-1/8 1/2-1/2 1/4-1/4 3/8-1/4 3/8-3/8 1/2-1/4	 SP04 Pagoda type mouth 1/8-06 3/8-06 1/2-10 3/4-16 1/8-08 3/8-08 1/2-12 3/4-19 1/8-10 3/8-10 1/2-14 3/4-21 1/8-12 3/8-12 1/2-16 3/4-25 1/4-06 3/8-14 3/4-08 1-19 1/4-08 3/8-16 3/4-10 1-25 1/4-10 1/2-06 3/4-12 1-29 1/4-12 1/2-08 3/4-14	 SP05 Pagoda type elbow connector 1/8-06 1/4-10 1/2-06 1/8-08 1/4-12 1/2-08 1/8-10 3/8-06 1/2-10 1/8-12 3/8-08 1/2-12 1/4-06 3/8-10 1/4-09 3/8-12	 SP06 Y type forging 06 08 10 12
 SP07 Stretcher 1/8-1/4 1/2-3/4 1/8-3/8 3/4-1 1/4-3/8 1/4-1/2 3/8-1/2 3/8-3/4	 SP08 Tee male connector 1/8 1/4 3/8 1/2	 SP09 Tee female connector 1/8 1/4 3/8 1/2	 SP10 Dyad elbow male connector 1/8-1/8 1/2-3/8 1/4-1/8 1/2-1/2 1/4-1/4 3/8-1/4 3/8-3/8 1/2-1/4	 SP11 Dyad elbow female connector 1/8-1/8 1/4-1/4 3/8-3/8 3/8-1/4 1/2-1/2	 SP12 Dyad elbow male & female connector 1/8-1/8 1/4-1/4 3/8-3/8 1/2-1/2 3/4-3/4

One Touch Brass Fitting

 SP13 One touch straight female connector 06-1/4 10-1/8 06-3/8 10-1/4 06-1/2 10-3/8 08-1/8 10-1/2 08-1/4 12-1/4 08-3/8 12-3/8 08-1/2 12-1/2	 SP14 One touch straight connector 04 06 08 10 12	 SP15 One touch tee connector 04 06 08 10 12	 SP16 One touch elbow connector 04 06 08 10 12	 SP17 One touch elbow male connector 06-1/8 10-1/8 06-1/4 10-1/4 06-3/8 10-3/8 06-1/2 10-1/2 08-1/8 12-1/4 08-1/4 12-3/8 08-3/8 12-1/2	 SP18 One touch elbow female connector 06-1/8 10-1/8 06-1/4 10-1/4 06-3/8 10-3/8 06-1/2 10-1/2 08-1/8 12-1/4 08-1/4 12-3/8 08-3/8 12-1/2
--	--	---	---	---	---

Nickel-Plate Auto-Lock Coupler

 SP19 One touch Straight male connector 06-1/8 10-1/8 06-1/4 10-1/4 06-3/8 10-3/8 06-1/2 10-1/2 08-1/8 12-1/4 08-1/4 12-3/8 08-3/8 12-1/2 08-1/2	 SP20 One touch tee straight male union 06-1/8 10-1/8 06-1/4 10-1/4 06-3/8 10-3/8 06-1/2 10-1/2 08-1/8 12-1/4 08-1/4 12-3/8 08-3/8 12-1/2 08-1/2	 SP28 Speed control fitting(plug in elbow) 08-1/8 08-1/4	 YCN Quick coupler YCN 2-8x5N YCN 3-10x6.5N YCN 4-12x8N	 YCH Quick coupler YCH 2-8x5N YCH 3-10x6.5N YCH 4-12x8N
 YCM Quick coupler YCM 2-1/4N YCM 3-3/8N YCM 4-1/2N	 YCF Quick coupler YCF 2-1/4N YCF 3-3/8N YCF 4-1/2N	 YHN Quick coupler YHN 2-8x5N YHN 3-10x6.5N YHN 4-12x8N	 YHH Quick coupler YHH 2-8x5N YHH 3-10x6.5N YHH 4-12x8N	 YHM Quick coupler YHM 2-1/4N YHM 3-3/8N YHM 4-1/2N
 YHF Quick coupler YHF 2-1/4N YHF 3-3/8N YHF 4-1/2N				

Metal Coupler

 YHO-2 Round 2 Ways	 YHO-3 Round 2 Ways	 YHM-2 Straight 2 Ways	 YHM-3 Straight 3 Ways	 YHM-4 Straight 4 Ways	 YHM-5 Straight 5 Ways
-------------------------------	-------------------------------	----------------------------------	----------------------------------	----------------------------------	----------------------------------

Silencer

 Mini silencer BSLM-01 BSLM-02 BSLM-03 BSLM-04 BSLM-06 BSLM-08	 Silencer BSL-M5 BSL-08 BSL-01 BSL-10 BSL-02 BSL-12 BSL-03 BSL-16 BSL-04 BSL-06	 Regulate silencer BESN-01 BESN-02 BESN-03 BESN-04 BESN-06 BESN-08	 Stainless silencer BSSV-M5 BSSV-01 BSSV-02 BSSV-03 BSSV-04 BSSV-06 BSSV-08	 Stainless silencer BSSM-M5 BSSM-01 BSSM-02 BSSM-03 BSSM-04 BSSM-06 BSSM-08	 Silencer throttle valve BESL-01 BESL-02 BESL-03 BESL-04 BESL-06 BESL-08
--	--	--	---	---	--

 Silencer throttle valve BESB-01 BESB-02 BESB-03 BESB-04 BESB-06 BESB-08	 PSE plastic silencer PSE-M5 PSE-01 PSE-02 PSE-03 PSE-04 PSE-06 PSE-08 G1	 PSL Plastic silencer PSL-01 PSL-02 PSL-03 PSL-04
---	---	---

Tube cutter

Code : QA-8
(Use for 4-8mm)

Code : QA-10
(Use for 4-12mm)



Air gun

 YAG-A	 YAG-B	 YAG-F (Energy Efficient type)	 YAG-C	 YAG-D	 YAG-E
------------------	------------------	--	------------------	------------------	------------------

PU Pneumatic Tube



● Ordering Code

PU 08 60 B
 | | |
 PU tube Standard Specification Sheet color

● Characteristics :


1. With good resistance to the high press, vibration, abrasion, climate, and flection.
2. light weight, east equipment, convenience to fitting.
3. male & female pneumatic fitting's size precision is high, applying for all kinds connector.
4. multifold colors of fitting offered.

※ Not explosion within 5 mins for 2 times working pressure, at normal temperature 60°C .

PU Tube/Standard Specification Sheet

Code	PU0320	PU0425	PU0640	PU0850	PU1065	PU1280	PU1611
O.D (mm)	φ 3.0	φ 4.0	φ 6.0	φ 8.0	φ 10.0	φ 12.0	φ 16.0
I.D (mm)	φ 2.0	φ 2.5	φ 4.0	φ 5.0	φ 6.5	φ 8.0	φ 11.0
Working Pressure kgf/cm ²	10	10	10	10	10	10	10

Pneumatic tube color

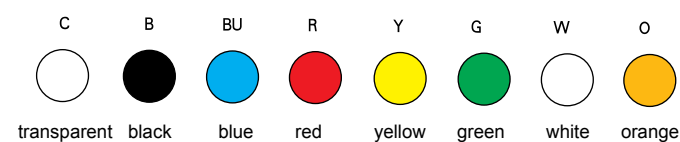

PA Pneumatic Tube



● Ordering Code

PA 08 60 B
 | | |
 Nylon tube Standard Specification Sheet color

● Characteristics :

1. With good resistance to the high press, vibration, abrasion, climate, and flection.
2. light weight, east equipment, convenience to fitting.
3. male & female pneumatic fitting's size precision is high, applying for all kinds connector.
4. multifold colors of fitting offered.

※ Not explosion within 5 mins for 2 times working pressure, at normal temperature 60°C .

PA Nylon Tube/Standard Specification Sheet

Code	PA0320	PA0425	PA0640	PA0860	PA1065	PA1280	PA1611
O.D (mm)	φ 3.0	φ 4.0	φ 6.0	φ 8.0	φ 10.0	φ 12.0	φ 16.0
I.D (mm)	φ 2.0	φ 2.5	φ 4.0	φ 6.0	φ 6.5	φ 8.0	φ 11.0
Working Pressure kgf/cm ²	24	24	24	24	24	24	24

Pneumatic tube color

